



# BACKUP POWER CONTROLLER

## RCB1200 SERIES

### Features



DIMENSIONS : 151(L) x 99(W) x 35(H)mm  
WEIGHTS: 500g

- Functioned as UPS when connecting external battery
- Battery Reverse Protection
- Battery Low Voltage Protection (Automatic Disconnect)
- Signal of AC Power Cut-off (Battery Powered)
- Convection cooled
- 2 years Warranty

### General specifications

#### INPUT

Input range	90~132/180~264VAC (Selectable) 220~380VDC
Input frequency	47~63Hz
Inrush current (25° C)	20A/110VAC 40A/220VAC

#### OUTPUT

Hold-up time	13mS
Short protection	Autorecovery
Overload protection	Automatic power limited

### Detail specifications

#### 200 Watts

MODEL	O/P Volt Adj. $\pm$ %	Battery Voltage	Load(Current) <sup>1</sup>			Ripple & Noise <sup>4</sup>	Line REG. <sup>2</sup>	Load REG. <sup>3</sup>	Efficiency <sup>5</sup>
			Min.	Rated	Max.				
RCB1200-24M	V1: +27.6V $\pm$ 10% B+: +27.6V-----	24V	0A 0A	7.25A 0.5A	7.25A ----	240mVp-p ----	$\pm$ 1% ----	$\pm$ 1% ----	85% Min.

### Relay Contact Instructions (Max. 1A)

Relay contact is open circuit to ground when power source is normal;  
Relay contact is short circuit to ground when power source is failed (battery powered).

#### CE Standards

EN 550 32, EN 550 35,  
EN 61000-3-2, EN 61000-3-3,  
(EN 61000-4-2, EN 61000-4-3,  
EN 61000-4-4, EN 61000-4-5,  
EN 61000-4-6, EN 61000-4-8,  
EN 61000-4-11)  
LVD: EN 62368-1

#### Safety Standards

UL/CUL 60950 Meet  
CE 60950 Marking

#### Environments


Operating Temperature -15~ 50°C, Ambient  
Operating Humidity 20 ~ 90% RH, No Condensing  
Storage Temperature -20 ~ 85°C, Ambient  
Vibration 2G, 10~500Hz, 3 axes

- NOTE :**
1. Each output can provide up to maximum load, but total load can not exceed rated output power.
  2. Line regulation is measured from low line to high line at rated load.
  3. Load regulation is measured from 20% to 100% of rated load at 220VAC input.
  4. Ripple & Noise are measured with 20MHz oscilloscope at 220VAC by using a 20cm long 12" twisted pair-wire with a 0.1uF/630V metal capacitor & a 47uF electrolytic capacitor parallel on the test point.
  5. Efficiency is measured at rated load and 220VAC input.
  6. Hold-up time is measured at rated load and 220VAC input.
  7. When using the product, we suggest keeping the temperature of the power supply enclosure below 70 °C. (It is recommended to conduct the heat to a iron or aluminum plate of 500x500mm or the same size with a thickness of 5 mm.)
  8. Reign Power reserve the right to change specifications at any time without notice.



### Battery Charger Connection

### REIGN POWER'S BACKUP POWER SUPPLY

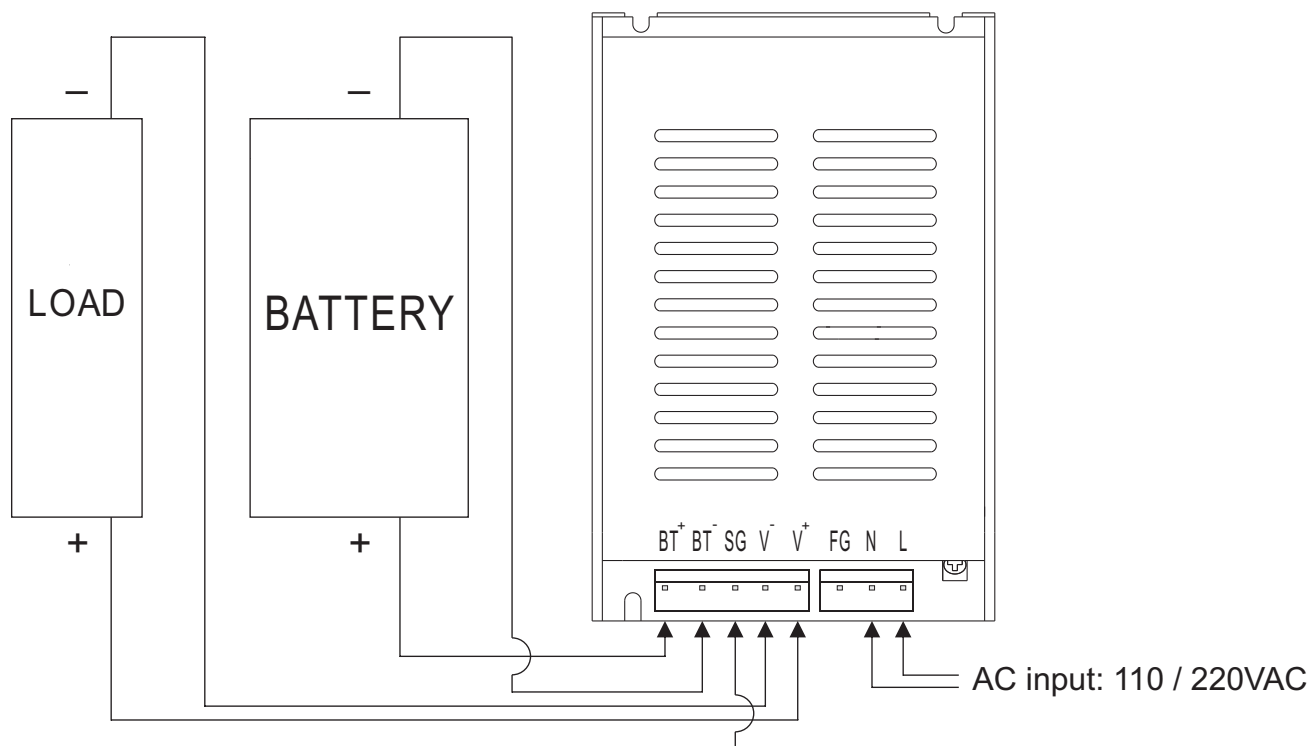

Power source normal: SG contact is open circuit to ground. Green LED on, Red LED off.

Power source failure (battery powered): SG contact is short circuit to ground. Green LED on, Red LED on.

### Panel Designation

Pin	Description
L	Line Terminal of Input
N	Neutral Terminal of Input
FG	Groud(Earth)
SG	Power Source Failure (battery powered) Terminal, Green LED on, Red LED on
V+	DC Output + Terminal
V-	DC Output - Terminal
BT+	DC Output Battery + Terminal
BT-	DC Output Battery - Terminal



### Output Voltage / Battery Charging and Discharging Curve

