



AC → DC SWITCHING POWER SUPPLY

RPH1240D SERIES

All the patents are held accountable counterfeiting.

Features



UL US
E225775



Green Power

- UL508, EN 62368 approved
- Standard/Din Rail Mounting Dual Purpose
- Easy mounting (one-step installation)
- Full Range Input with PFC
- Comply with High Efficiency Power 80Plus Criterion
- 92% High Efficiency
- Build-in output stability monitor
- Split rail & Series connection possible
- Convection cooled high reliability
- 100% burn-in test
- 2 years warranty
- Output modify range: 3V~200VDC

DIMENSIONS:100(H)*110(D)*60(W)mm

WEIGHTS: 740g

General specifications

INPUT

Input range

90~264VAC

120~380VDC

Input frequency

47~63Hz

Inrush current (25°C)

20A/110VAC

40A/220VAC

Power factor

95% Min.

OUTPUT

Hold-up time

16ms

Short protection

Autorecovery

Over load protection

Automatic power limited

Optional 5V/3A AUX output

for models which output voltage lower than 40VDC

Detail specifications

240 Watts

MODEL	O/P Volt Adj. ± %	Load(Current) ¹			Ripple & Noise ⁴	Line REG. ²	Load REG. ³	Efficiency ⁵	O.V.P
		Min.	Rated	Max.					
RPH1240D-24CENDA	V : +24V ±10%	0A	10A	10A	240mV	±1%	±1%	91% Ref.	31.4 ~ 34.7V
RPH1240D-36CENDA	V : +36V ±10%	0A	6.7A	6.7A	360mV	±1%	±1%	92% Ref.	47.8 ~ 53.2V
RPH1240D-48CENDA	V : +48V ±10%	0A	5A	5A	480mV	±1%	±1%	91% Ref.	64.6 ~ 71.4V

Please Choose Fit Function, And Fill In The Blank With Suitable Words.

Order Model: RPH1240D-24C

Optional Function:

Terminal Block: "T" : PCB Barrier Terminal Block

"E" : Mini Terminal Block

Option: " " : Power Ready Relay Function

"N" : No Power Ready Relay Function


Monitor: " " : No Monitor

"D" : Monitor Display

Type: " " : No Display Function

"A" : Output Voltage Display

Relay internal connection



T Type
Terminal Block

E Type
Terminal Block

CE Standards

EN 55032, EN 55035,
EN 61000-3-2, EN 61000-3-3,
(EN 61000-4-2, EN 61000-4-3,
EN 61000-4-4, EN 61000-4-5,
EN 61000-4-6, EN 61000-4-8,
EN 61000-4-11)
Heavy Industry level, criteria A
LVD: EN 62368-1

Safety Standards



UL 508 APPROVAL



CE Marking

Environments

Operating Temperature

-10 ~ 60°C, Ambient

Operating Humidity

20 ~ 90% RH, No Condensing

Storage Temperature

-20 ~ 85°C, Ambient

Vibration

2G, 10~500Hz, 3 axes

WEB : <http://www.gpsmps.com/>

Tel : 0086-755-29769042

E-mail : sale@gpsmps.com

+86 13410894308



AC → DC SWITCHING POWER SUPPLY

RPH1240D SERIES

All the patents are held accountable counterfeiting.

NOTE

1. Each output can provide up to maximum load, but total load can not exceed rated output power.
2. Line regulation is measured from low line to high line at rated load.
3. Load regulation is measured from 20% to 100% of rated load at 220VAC input.
4. Ripple & Noise are measured with 20MHz oscilloscope at 220VAC by using a 20cm long 12" twisted pair-wire with a 0.1uF/630V metal capacitor & a 47uF electrolytic capacitor parallel on the test point.
5. Efficiency is measured at rated load and 220VAC input.
6. Hold-up time is measured at rated load and 220VAC input.
7. Output Voltage Adjustable is measured on 5% of rated load.
8. The product uses metal enclosure for cooling. To ensure product lifespan, a clearance of at least 1 cm at the side of the product, 2 cm at top and bottom of the product should be maintained when installing.
9. Reign Power reserve the right to change specifications at any time without notice.




AC → DC SWITCHING POWER SUPPLY

RPH1240D SERIES

All the patents are held accountable counterfeiting.

Mechanical Details

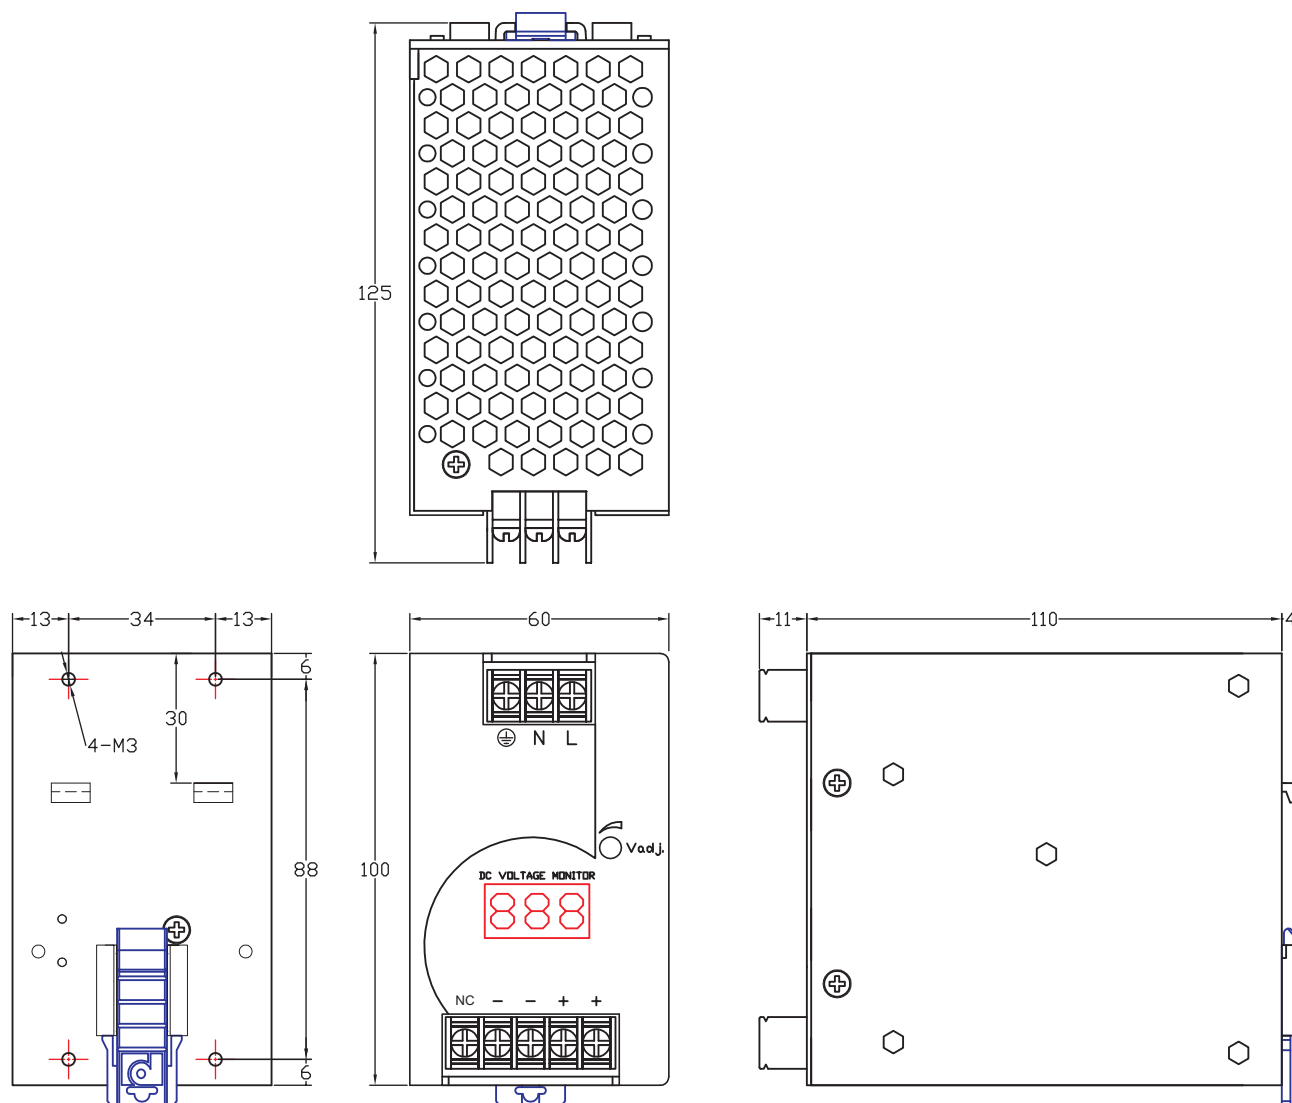

Panel Designation

CASE NO. : CS060DR
UNIT : mm
DIMENSION : 100(H)*110(D)*60(W)
MATERIAL : ALUMINUM
COLOR : ORIGINAL ALUMINUM

Symbol	Description
L	Line Terminal Of AC Input (No Polarity At DC Input)
N	Neutral Terminal Of AC Input (No Polarity At DC Input)
⊕	Grounding (Earth)
+	DC Positive Output Terminal
-	DC Negative Output Terminal
NC	No Output Terminal
DC Voltage Monitor	Display Output Voltage
V adj.	Potentiometer For Output Voltage