

**DIN RAIL UPS SERIES** 

All the patents are held accountable counterfeiting.

#### **Features**



DIMENSIONS:102(H)\*75.5(D)\*45(W)mm WEIGHTS: 181g

# CE

- DC uninterruptible power supply, parallel connection to DC bus
- Convection cooled
- Din Rail/ Screw Mounting Dual Purpose
- Easy mounting (one-step installation)
- DC UPS Design
- Battery Discharge Protection with Low voltage
- 0.5A Charge
- Build-in battery fuse
- Battery voltage display
- Build-in buzzer and RDY relay signal alarm of abnormal power source

#### **Detail specifications**

Model	Lead acid battery	External Power Supply	Battery low voltage protection	Build-in fuse of battery	Battery output voltage
UPS15-12	12V	13.8V	10V	15A	10~13.8V
UPS15-24	24V	27.6V	20V	15A	20~27.6V

Model	Li-ion battery	External Power Supply	Battery low voltage protection	Build-in fuse of battery	Battery output voltage
UPS15-24L	24V (7 Cells)	24V	20V	15A	20~24V

#### **RDY** connection

RDY contact is open circuit to ground when power source is normal; short circuit when abnormal power source.



### **CE Standards**

EN 55032, EN 55035, EN 61000-3-2, EN 61000-3-3, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8, EN 61000-4-11

# Safety Standards



UL 62368 Mee t

CE Marking

#### **Environments**

Operating Temperature
Operating Humidity
Storage Temperature
Vibration

-15  $\sim$  50°C, Ambient 20  $\sim$  95% RH, No Condensing -20  $\sim$  85°C, Ambient

2G, 10~500Hz, 3 axes

Reign Power reserve the right to change specifications at any time without notice.

WEB: http://www.gpsmps.com/ E-mail: sale@gpsmps.com




**DIN RAIL UPS SERIES** 

All the patents are held accountable counterfeiting.

## **Application Circuit 1**


Provide backup after AC failure.

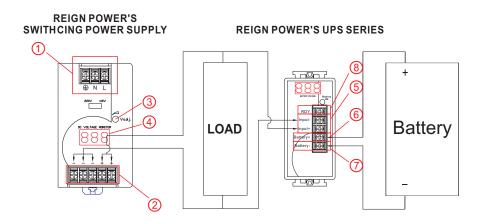

No.	Description
1	100-240VAC input
2	DC output
3	Output voltage control
4	Output voltage display
(5)	DC input
6	Battery positive terminal
7	Battery negative terminal
8	RDY relay signal

# **Application Circuit 2**

Redundant power module provides backup after AC failure or power malfunction.

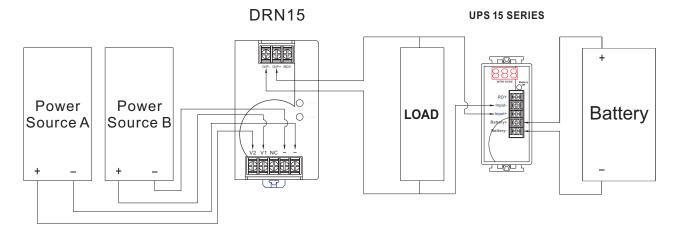

Reign Power reserve the right to change specifications at any time without notice.


WEB: http://www.gpsmps.com/ E-mail: sale@gpsmps.com




**DIN RAIL UPS SERIES** 

All the patents are held accountable counterfeiting.

# **Lead Acid Battery Charging and Discharging Curve**

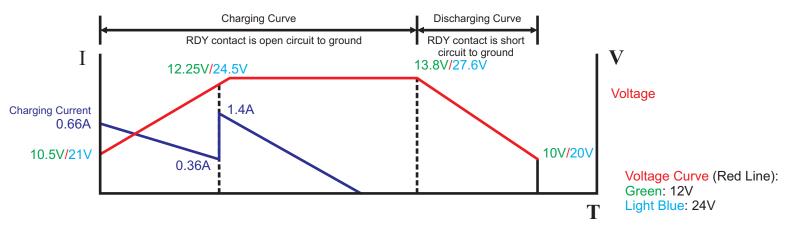

# Li-ion Battery Charging and Discharging Curve

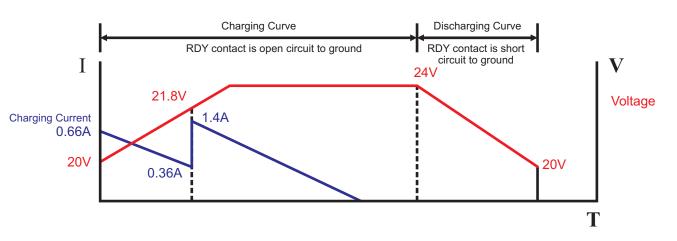

Reign Power reserve the right to change specifications at any time without notice.


WEB: http://www.gpsmps.com/ E-mail: sale@gpsmps.com








### All the patents are held accountable counterfeiting.

#### **Mechanical Details**









CASE NO.: CS024DR

**UNIT: mm** 

**DIMENSION:** 103(H)\*74(D)\*45(W)

**MATERIAL: PLASTIC** 

**COLOR: GRAY** 

Reign Power reserve the right to change specifications at any time without notice.

WEB: http://www.gpsmps.com/ E-mail: sale@gpsmps.com