




Series Connection Circuit

Picture 1

(串接使用接線圖)

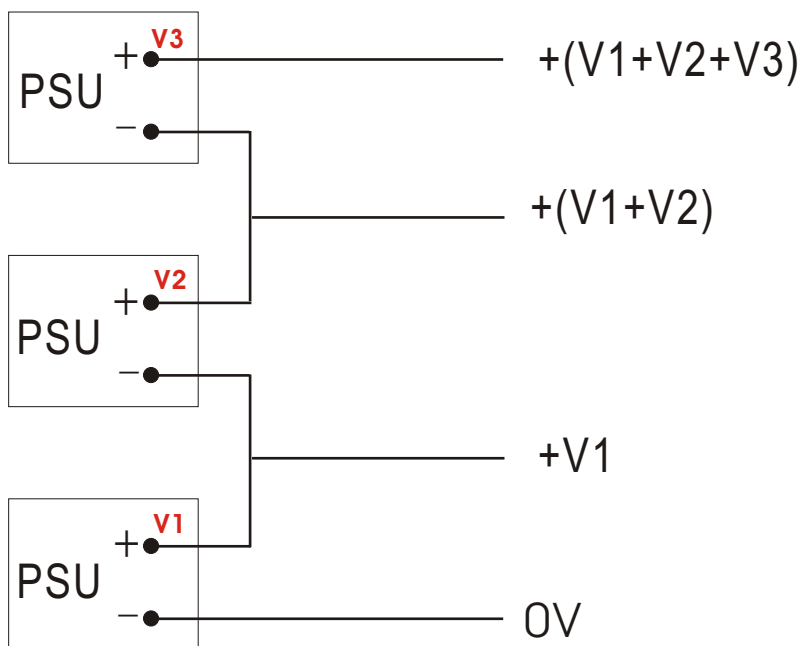


PS: $V1 \sim Vx$ can be any voltage
 $V1 \sim Vx$ 可為任何伏特數

Split Rail Connection Circuit

Picture 2

(逆接使用接線圖)

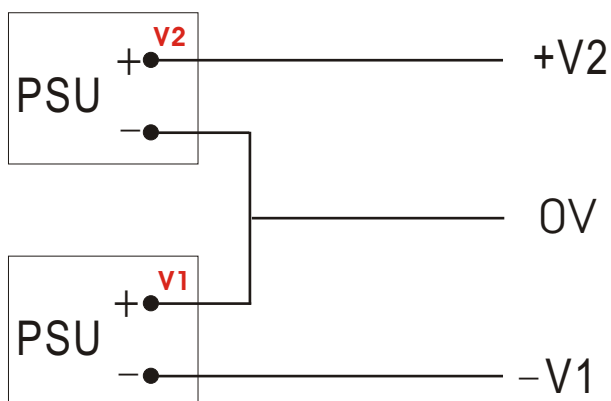




Redundant Use Connection Circuit

(備源使用接線圖)

Picture 3

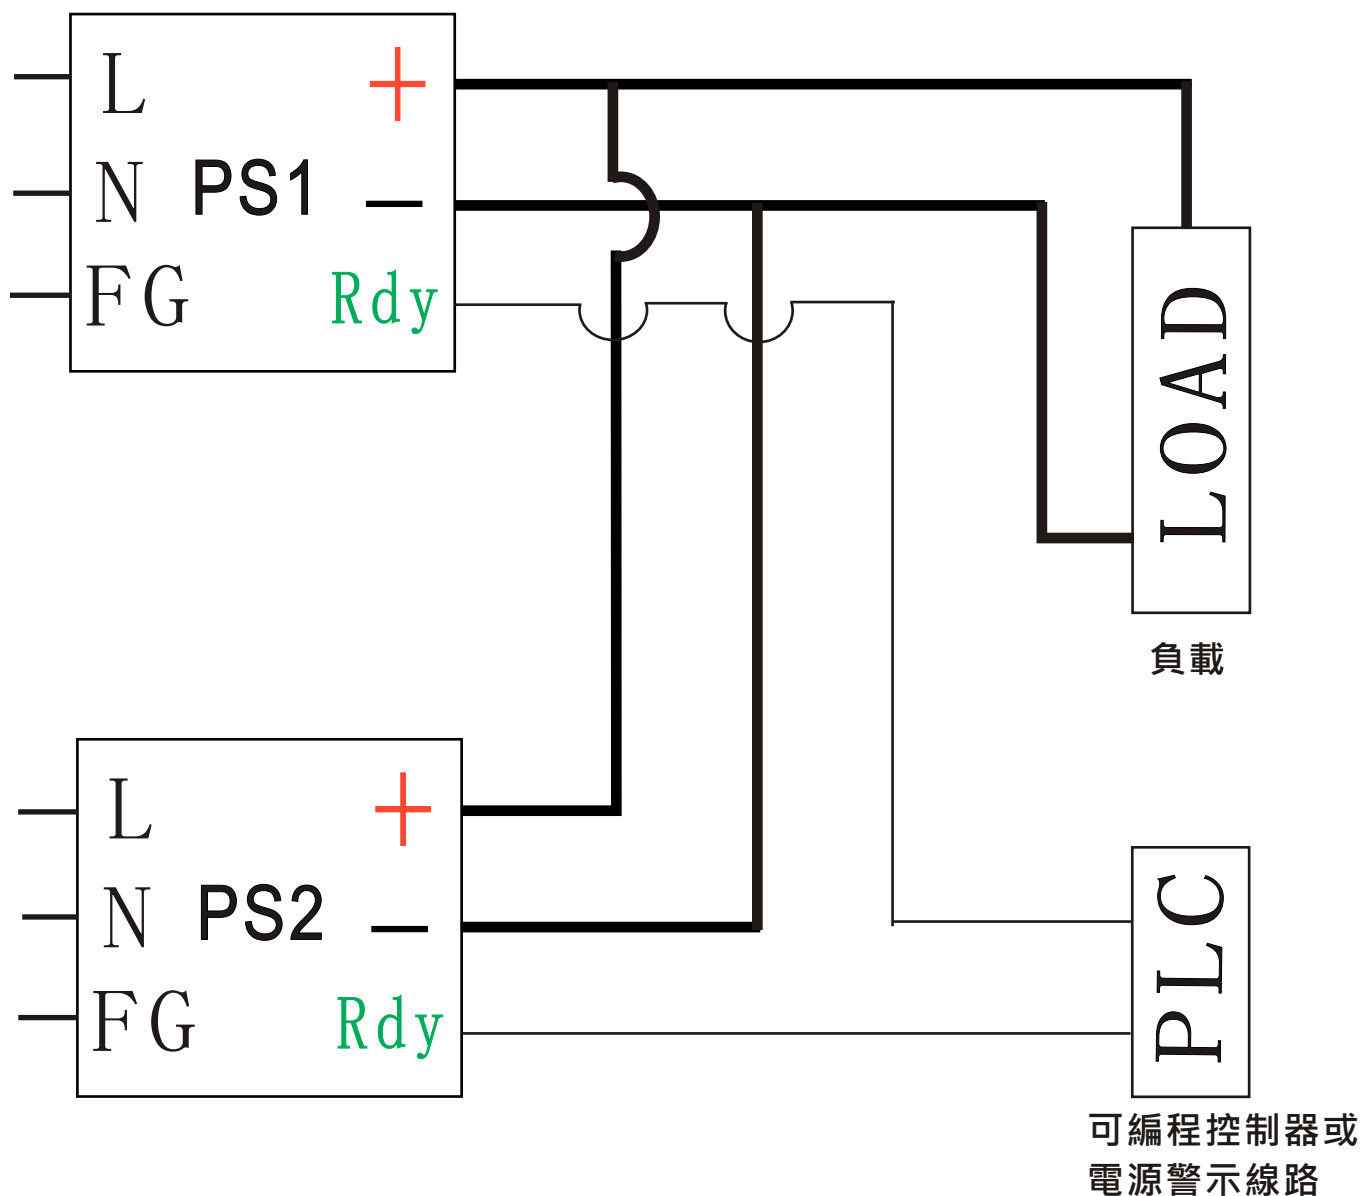

NOTE:

The line total output generated from the remaining PSU is the same.

無論備源幾台總輸出功率等同一台電源

$PS1 = PS2 = \dots = PSn = PS(\text{Output})$


$PS1 = PS2 = \dots = PSn = PS(\text{總輸出})$



Normal Use With Remote Senser Circuit

(外接電壓偵測使用接線圖)


Picture 4

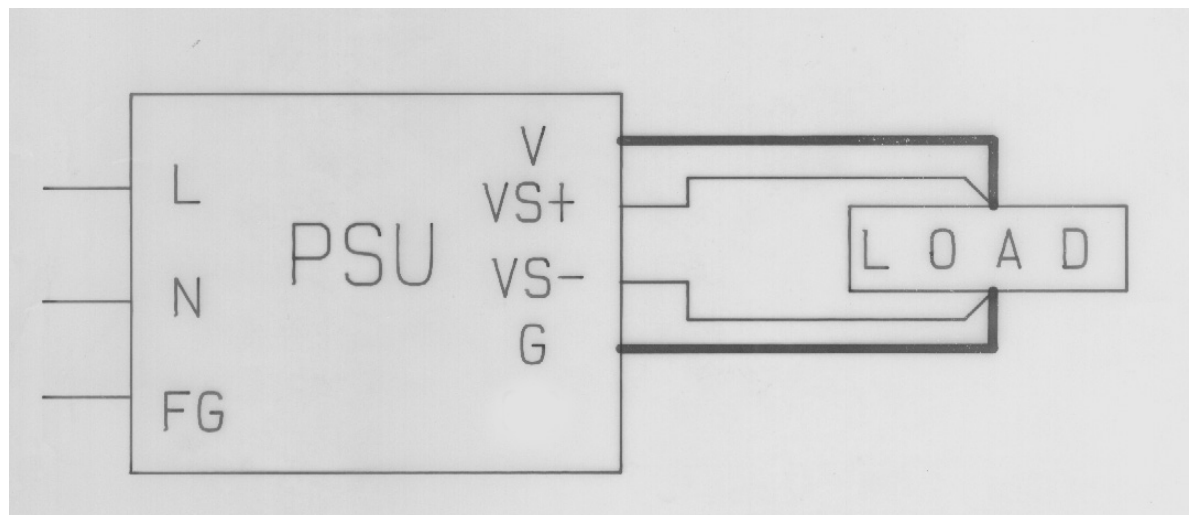

Parallel Use With Current Share Connection Circuit

(並聯及均流使用接線圖)

Picture 5

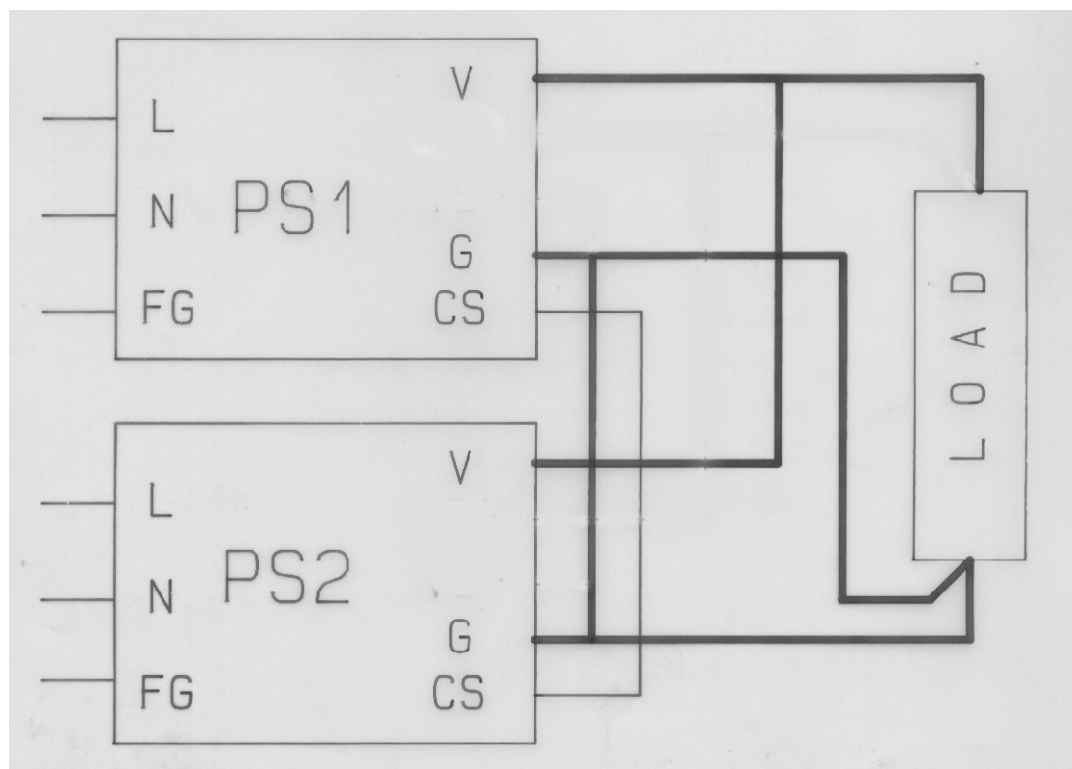

Total Output Current=PS1+PS2+.....+PSn


總輸出電流=PS1+PS2+.....+PSn



Parallel Use With Remote Sense & Current Share Connection Circuit

(並聯加遠端電壓偵測及均流使用接線圖)

Picture 6

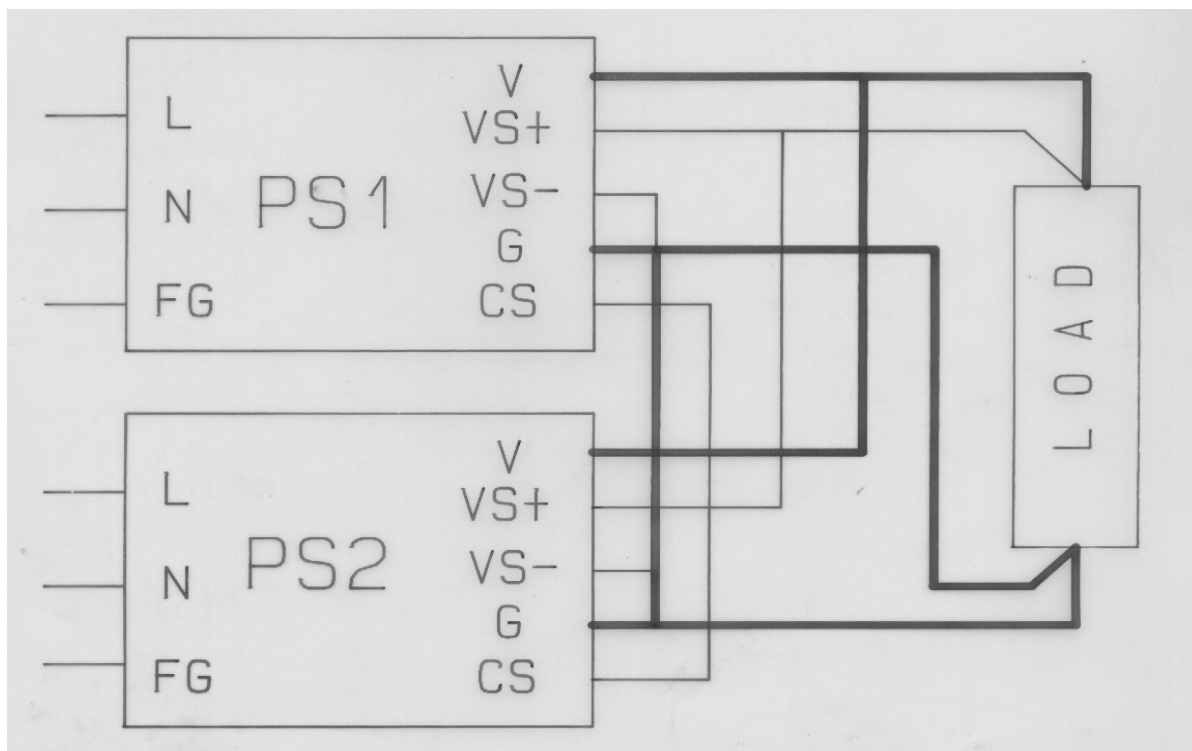

Total Output Current = PS1 + PS2 + + PSn

總輸出電流 = PS1 + PS2 + + PSn